




FT.16 FICHA TÉCNICA

GRADIL EM FIBRA DE VIDRO CARGA LINEAR



REFERÊNCIA
GR003

FLECHA PARA CARGA LINEAR (mm)

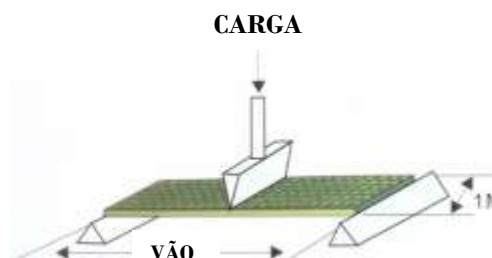

Malha de 38mm / 25mm Espessura

VÃO mm	CARGA KG/m ²						CARGA DE ROTURA (Kg)
	75	149	298	477	589	745	
300	-	-	-	-	-	-	9427
457	0,559	1,143	2,159	3,073	4,115	4,750	3910
610	0,864	1,702	3,505	5,156	6,706	8,179	2924
914	2,896	5,918	12,116	18,440	-	-	1948
1067	4,597	9,398	19,253	-	-	-	1617
1219	5,715	11,633	-	-	-	-	1461

Malha de 38mm / 38mm Espessura

VÃO mm	CARGA KG/m ²						CARGA DE ROTURA (Kg)
	75	149	298	477	589	745	
305	0,279	0,356	0,483	0,61	0,762	0,889	17116
610	0,356	0,66	1,245	1,85	2,464	3,073	8718
914	0,864	1,083	3,683	5,563	7,417	9,296	5817
1067	1,397	2,87	5,842	8,814	11,786	14,757	4291
1219	2,261	4,749	9,677	14,63	19,583	-	3755

Malha de 50mm / 50mm Espessura

VÃO mm	CARGA KG/m ²						CARGA DE ROTURA (Kg)
	75	149	298	477	589	745	
305	0,279	0,305	0,406	0,483	0,635	1,041	21727
610	0,356	0,58	0,813	1,128	1,753	3,327	11713
914	0,508	1,118	2,235	3,2	5,156	10,058	7780
1067	0,584	1,295	2,718	4,14	6,985	14,122	6636
1219	0,914	1,93	3,937	5,918	9,957	-	5834

STEP - SOCIEDADE TÉCNICA DE ESTRUTURAS PULTRUDIDAS, LDA

Sede

Estrada Nacional 249-4, Km 4,9 Trajouce
2785-653 São Domingos de Rana
Lisboa - PORTUGAL
Telef. (351)21 915 62 83/5 Fax. (351)21 915 62 84



Filial Madeira

Zona Franca Industrial
Plataforma n.º 34-B
9200-047 Caniçal - MADEIRA
Telef./Fax. (351)291 961 062
E-mail: luisferreira@step.pt