




FT.15 FICHA TÉCNICA

GRADIL EM FIBRA DE VIDRO CARGA UNIFORME



REFERÊNCIA
GR002

FLECHA PARA CARGA UNIFORME (mm)

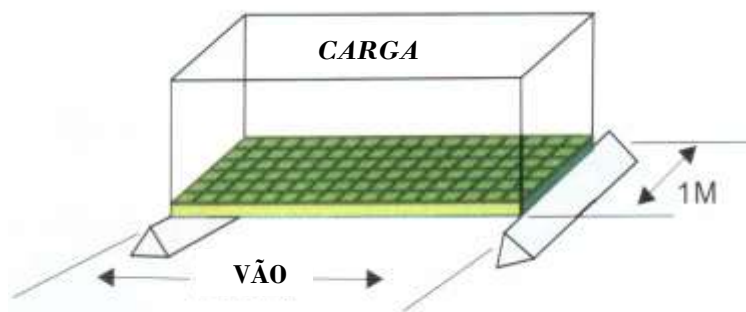

Malha de 38mm / 25mm Espessura

VÃO mm	CARGA KG/m ²							
	244	489	977	1466	1955	2444	3665	5000
300	-	-	-	-	-	-	-	1,352
457	0,660	1,092	1,930	2,769	3,607	4,470	6,579	-
610	1,118	2,108	4,140	6,172	8,179	10,211	15,256	-
762	2,667	5,387	10,820	16,281	21,717	-	-	-
914	5,537	11,176	21,717	-	-	-	-	-
1067	10,287	20,752	-	-	-	-	-	-

Malha de 38mm / 38mm Espessura

VÃO mm	CARGA KG/m ²							
	244	489	977	1466	1955	2444	3665	
305	0,254	0,305	0,381	0,457	0,559	0,635	0,838	
610	0,432	0,813	1,549	2,311	3,073	3,8354	5,74	
914	1,702	3,454	6,959	10,465	13,97	17,475	-	
1067	3,149	6,401	12,903	19,406	-	-	-	
1219	5,969	12,167	24,511	-	-	-	-	

Malha de 50mm / 50mm Espessura

VÃO mm	CARGA KG/m ²							
	244	489	977	1466	1955	2444	3665	
305	0,254	0,279	0,33	0,381	0,432	0,483	0,737	
610	0,318	0,584	0,965	1,372	1,753	2,134	4,115	
914	1,194	2,108	3,937	5,766	7,595	9,449	18,593	
1067	1,448	2,997	6,096	9,22	12,344	15,443	-	
1219	2,413	4,928	9,957	14,961	19,989	-	-	

STEP - SOCIEDADE TÉCNICA DE ESTRUTURAS PULTRUDIDAS, LDA

Sede

Estrada Nacional 249-4, Km 4,9 Trajouce
2785-653 São Domingos de Rana
Lisboa - PORTUGAL
Telef. (351)21 915 62 83/5 Fax. (351)21 915 62 84



Filial Madeira

Zona Franca Industrial
Plataforma n.º 34-B
9200-047 Caniçal - MADEIRA
Telef./Fax. (351)291 961 062