




FT.17 FICHA TÉCNICA

GRADIL FIBRA DE VIDRO CARGA CONCENTRADA



REFERÊNCIA
GR004

FLECHA PARA CARGA CONCENTRADA COM PAINEL INTEIRO (mm)

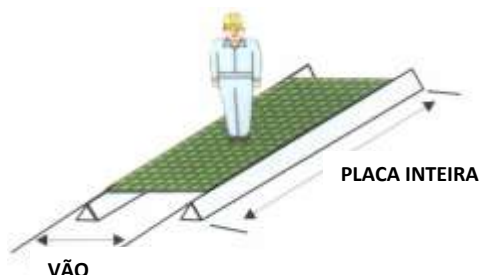

Malha de 38mm / 25mm Espessura

VÃO mm	CARGA KG						
	149	372	745	1117	1490	2234	2979
457	0,254	0,686	1,550	2,159	2,667	4,166	5,232
610	0,734	1,651	3,175	4,623	6,121	9,119	12,116
914	1,778	4,445	8,814	13,157	-	-	-
1219	2,946	7,544	15,062	-	-	-	-

Malha de 38mm / 38mm Espessura

VÃO mm	CARGA KG						
	149	372	745	1117	1490	2234	2979
457	0,203	0,406	0,711	0,889	1,143	1,676	2,21
610	0,356	0,889	1,499	0,905	2,413	3,531	4,267
914	0,61	1,5	2,9	4,14	5,41	7,95	10,566
1219	0,914	2,388	4,699	6,96	9,195	13,665	-

Malha de 50mm / 50mm Espessura

VÃO mm	CARGA KG					
	372	745	1117	1490	2234	2979
457	0,281	0,54	0,622	0,8	1,461	1,569
610	0,666	1,049	0,689	1,809	2,471	3,114
914	1,05	1,914	3,087	3,895	5,247	8,135
1219	1,671	3,534	5,22	6,43	10,248	15,721
1530	2,131	4,275	6,655	8,206	13,067	19,125

STEP - SOCIEDADE TÉCNICA DE ESTRUTURAS PULTRUDIDAS, LDA

Sede

Estrada Nacional 249-4, Km 4,9 Trajouce
2785-653 São Domingos de Rana
Lisboa - PORTUGAL
Telef. (351)21 915 62 83/5 Fax. (351)21 915 62 84
E-mail: info@step.pt



Site: www.step.pt

Filial Madeira

Zona Franca Industrial
Plataforma n.º 34-B
9200-047 Caniçal - MADEIRA
Telef./Fax. (351)291 961 062
E-mail: luísferreira@step.pt